

SmartPower 48V150Ah

SSIFP48150A lithium-ion battery system

SSIFP48150A, a powerful 48V LiFePO₄ battery product, has been especially designed to provide power backup for remote or outdoor telecom sites. Its modular design enables parallel installation meeting also the needs for larger power back up.



Benefits

- Increased energy in given space
- Easy installation and upscaling
- High operational reliability
- Optimized supervision strategy through remote control/diagnostic
- Excellent long life time
- Built-in intelligent BMS to protect the battery pack at any time and prolong its service life

Standards


a. Product

- IEC 60950
- IEC 62321
- IEC 62133
- UN 38.3
- UL 1642
- UL 1973

b. MS certification

- ISO 9001
- ISO 14001
- OHSAS 18001

Drawing

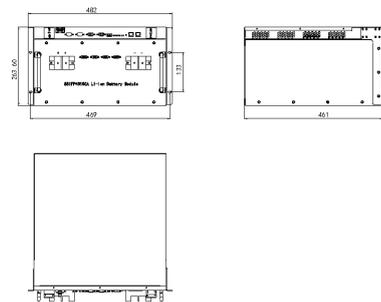


Specifications

Nominal Characteristics		
Battery Model		SSIFP48150A
Nominal Voltage		48V
Typical Capacity		150Ah(25°C,0.2C)
Typical Energy		7200 Wh
Volumetric Energy Density		134.0 Wh/dm ³
Gravimetric Energy Density		100.0 Wh/kg
Dimensions	Width	442mm
	Height	263.6mm(6U)
	Depth	461mm
Reference Weight		72.0Kg
Electrical Characteristics		
Voltage Window		40.5~54.0V
Charge Voltage Range		52.5~54.0V
Max. Permanent Discharge Current		150A
Max. Permanent Charge Current		150A
Faradic Charge Efficiency		99% (+20°C)
Energy Charge Efficiency		94% (+20°C)
Communication Interface (optional feature)		Modbus/SNMP/TACP
Additional Features (optional feature)		LCD Display
Operation Environment		
Charge Temperature		0°C to +55°C
Discharge Temperature		-20°C to +60°C
Storage Temperature		-20°C to +60°C
Protection Class		IP20


Discharge Data

Constant Current Discharge Data(25°C)												
Voltage/V	Current/A		0.1C	0.2C	0.3C	0.4C	0.5C	0.6C	0.7C	0.8C	0.9C	1.0C
	Time/h											
45.0			9.560	4.902	3.283	2.442	1.943	1.601	1.369	1.191	1.050	0.950
43.5			10.017	4.993	3.339	2.475	1.978	1.634	1.399	1.210	1.080	0.970
42.0			10.094	5.041	3.374	2.517	2.008	1.654	1.409	1.232	1.090	0.980
40.5			10.201	5.090	3.390	2.533	2.021	1.674	1.420	1.240	1.099	0.989


Performance Curve

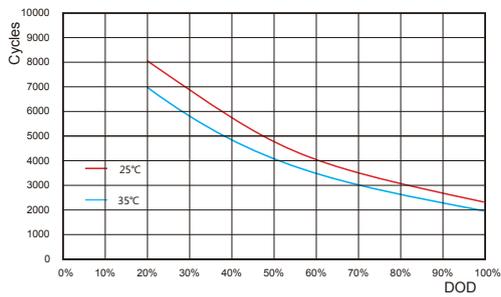


Cycle Life vs. Depth of Discharge (DOD)

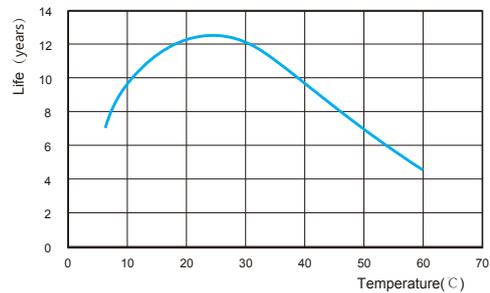


Calendar Life at Different Temperature

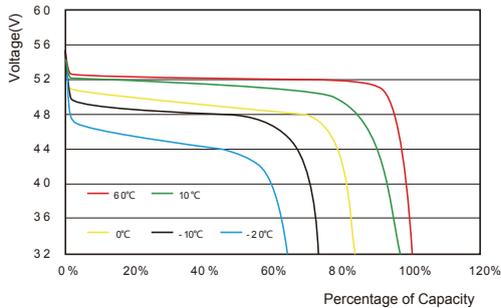


Discharge Curve at Different Temperature

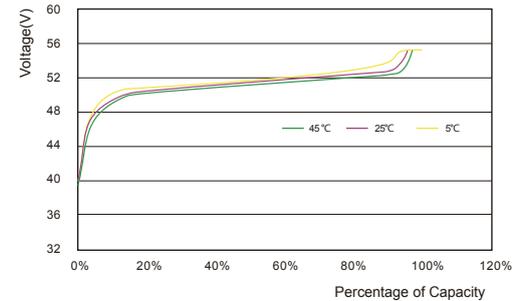

Charge Curve at Different Temperature

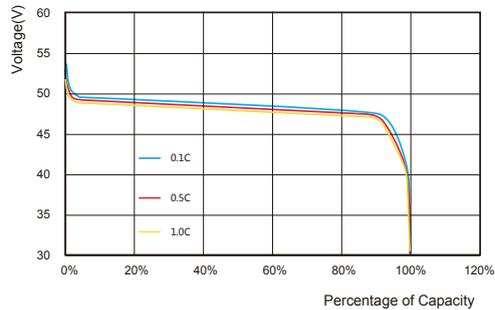

Discharge Curve at Different Rate (25°C)

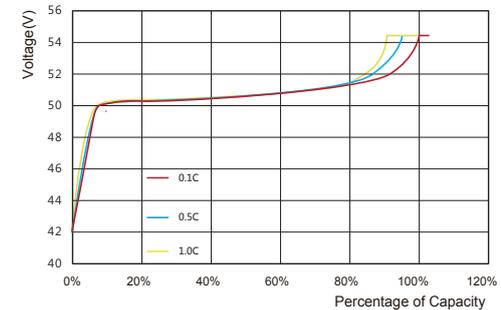

Charge Curve at Different Rate (25°C)

Contact information

Advanced Battery Technology BV
 Add. New Yorkstraat 14 1175 RD Lijnden Amsterdam, Netherland
 Web: <http://www.abtbatt.com> Email: sales@abtbatt.com

Copy right ABT BV,
 all rights reserved.
 (Edition: Aprl.,2020)