

AGM TECHNOLOGY
ABT Sunwind SWM Series

SWM2-3000

2V3000 Ah(10hr)



High Performance

The ABT Sunwind SWM range of VRLA lead acid batteries have been designed specific for use in applications which demand the highest levels of security and reliability. With proven compliance to the most rigorous international standards.

Sunwind SWM is recognized as premium battery for Solar and wind energy system, Energy equilibrium system applications. Sunwind's reputation for long service life combined with excellent high cyclic performance also makes it the number one choice for high integrity.

Mechanical Characteristics

	SI Unit	English Unit
Length	629mm	24.76inch
Width	346mm	13.62inch
Height	341mm	13.43inch
Total Height	351mm	13.82inch
Approx. Weight	174.0kg	383.60lbs
Type of material for box and lids : ABS Standard (FV0 Optional)		


Product Characteristics

- Thick Pb-Ca-Sn alloy grids designed to resist corrosion and prolong life
- Low resistance microporous glass fibre separator
- Low specific acid density
- Centralized venting system for gas ventilation
- Flame arrester to improve safety
- Pillar with brass insert where screwed on copper connector fitted with a bolt and stainless nut and washers
- Low Self Discharge rate: $\leq 3\%$ (20°C) Monthly on average
- U. L. Components Recognition
- Design life 15 years

Performance Characteristics

Nominal Voltage	2V
Number of Cell	4
Nominal Capacity 20°C (68°F)	10 hour rate (300A, 1.80V) 3000Ah 3 hour rate (750A, 1.80V) 2250Ah 1 hour rate (1650A, 1.75V) 1650Ah
Intensity	
Max. Discharge Current	20°C (68°F) 13000A(5s)
Short circuit current	20000A
Maximum charge current	450(15% of rated capacity)
Internal Resistance	Fully Charged battery 20°C (68°F) 0.09mOhms
Mass Energy(Wh/kg)	34.48
Volume Energy(Wh/L)	80.85
Self-Discharge	3% of capacity declined per month at 20°C(average)
Operating Temperature Range	Discharge -20~60°C Charge -10~60°C Storage -20~60°C
Charge Methods:	Constant Voltage Charge 20°C (68°F) Cycle use 2.34-2.38V Temperature compensation -3.5mV/°C/unit Standby use 2.24-2.28V Temperature compensation -3.5mV/°C/unit
Terminal Type	Inserted Thread and bolt M8X ϕ 18
Torque strength in N m	12~16
Handle Type	No
Flame arrester	Yes


Dimensions / Terminal

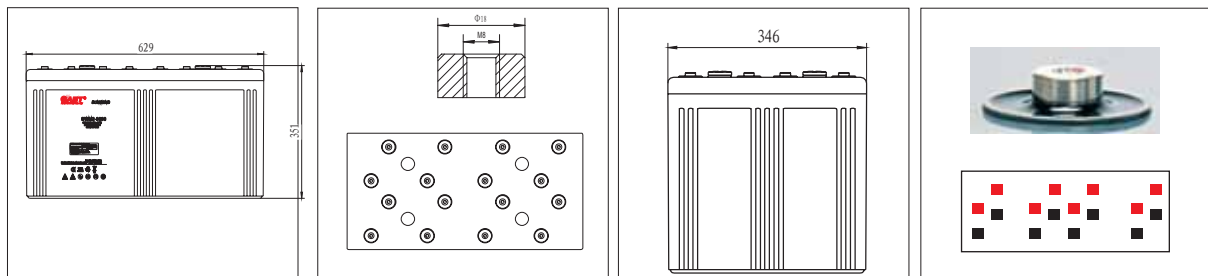


Capacities C₁-C₁₂₀ (20°C)

C ₁	C ₃	C ₅	C ₁₀	C ₁₀₀	C ₁₂₀
1.75Vpc	1.80Vpc	1.80Vpc	1.80Vpc	1.85Vpc	1.85Vpc
1650	2250	2550	3000	3540	3600


Constant Current Discharge Curve

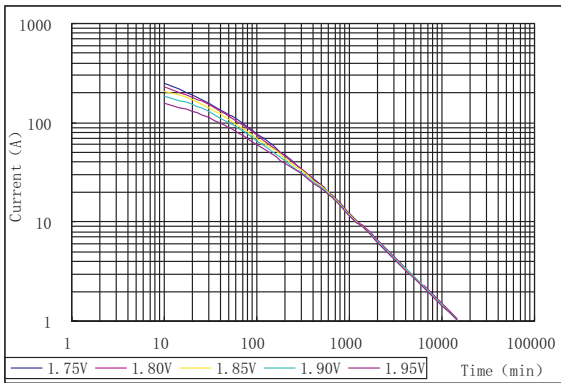


Capacity Vs Temperature

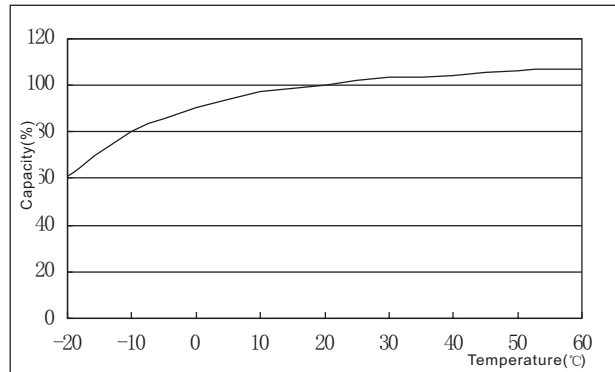


Self Discharge

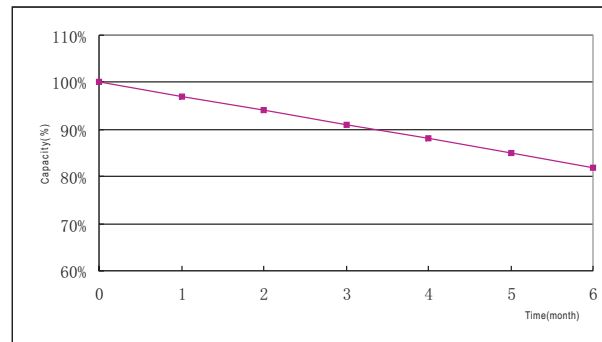

Capacity Discharge Curve

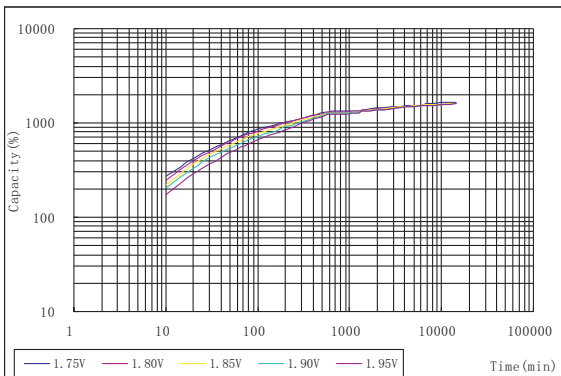

Floating Charge Voltage Vs Temperature

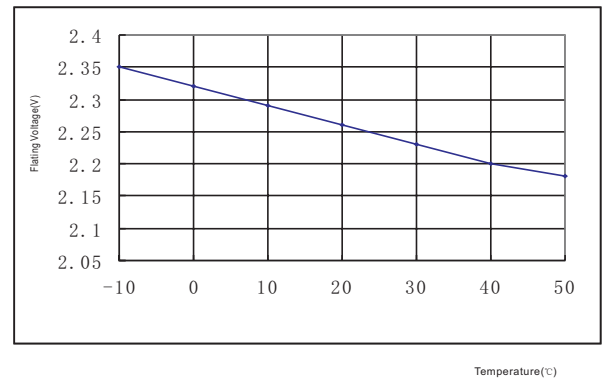

Contact information

Shandong Sacred Sun Power Sources Co., Ltd.
Add: 1, Shengyang Road, Qufu 273100 Shandong, China
Tel: +86-537-4438 666 extn 6028 Fax: +86-537-4411 936
Website: <http://www.abtbatt.com> Email: sales@abtbatt.com

ABT VRLA Battery: Available Power Range From 100Ah to 3000Ah

Copyright SACREDSUN,
All rights reserved.
(Edition: May.2011)