

TFT12-90

12V 360W(10min, 1.60Vpc)
12V 88Ah(10hr, 1.80Vpc)



High Performance

The ABT Enduro TFT VRLA batteries are designed for dual purposes of Telecom and UPS in floating and high rate discharge backup system with proven compliance to the most rigorous international standards.

Enduro TFT is also recognized as long service life and high performance batteries. The Enduro TFT front terminal monoblocs is compact design and standard footprint for 19" and 23" and ETST cabinet.

Mechanical Characteristics

	SI Unit	English Unit
Length	395mm	15.55inch
Width	105mm	4.13inch
Height	270mm	10.63inch
Total Height	270mm	10.63inch
Approx. Weight	28.2Kg	62.17lbs
Type of material for Box and lids : ABS Standard (FV0 Optional)		


Product Characters

- Pb-Ca-Sn alloy grids designed to resist corrosion and prolong life
- Low resistance microporous glass fibre separator
- Centralized venting system for gas ventilation
- Flame arrestor to improve safety
- Rope handles for easy installation
- Pillar with brass insert where screwed an copper connector fitted with a bolt and stainless nut and washers.
- Design life 10 years
- Low Self Discharge
- U. L. Component Recognition

Electrical Characteristics

Nominal Voltage	12V
Number of Cell	6
Capacity	
Nominal Power 20°C (68°F)	10 min rate (1.60Vpc) 360W/cell
Nominal Capacity 20°C (68°F)	20 hour rate (4.6A, 1.80Vpc)92Ah 10 hour rate (8.8A, 1.80Vpc)88Ah 1 hour rate (57.0A,1.60Vpc) 57Ah
Intensity	
Max. Discharge Current	20°C (68°F) 600A(5s)
Short circuit current	2600A
Maximum charge current	17.6A(20% of rated capacity)
Internal Resistance	Fully Charged battery 20°C (68°F)4.73mOhms
Mass Energy(Wh/kg)	37.45
Volumic Energy(Wh/L)	94.3
Self-Discharge	3% of capacity declined per month at 20°C(average)
Operating Temperature Range	Discharge -20~60°C Charge -10~60°C Storage -20~60°C
Charge Methods:	Constant Voltage Charge 20°C (68°F) Cycle use 14.4-14.7V Temperature compensation -24mV/°C Standby use 13.50-13.74V Temperature compensation -20mV/°C
Terminal Type	Inserted Thread and bolt M8X φ 18
Torque strength in Nm	12~16
Handle Type	Rope

Dimensions / Terminal

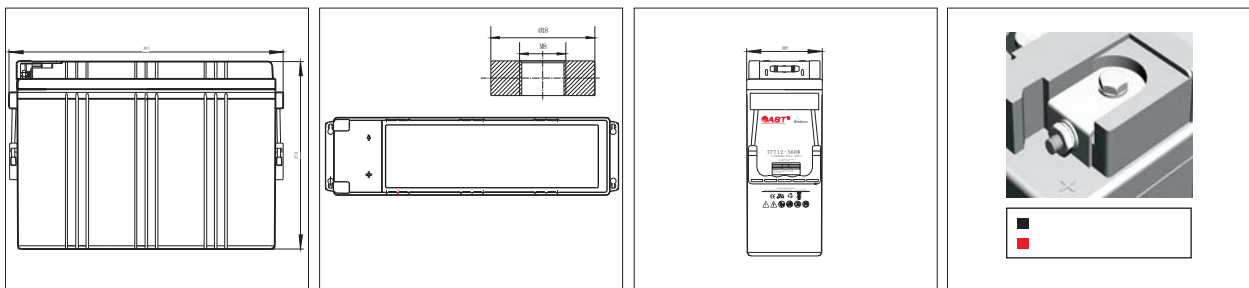


Constant Current Discharge Data (Amperes at 20°C/ 68°F)

End Volt. Per Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	12h	24h
1.60V	286	198.7	163.2	141.0	118.9	96.7	89.3	81.9	74.5	68.6	57.0	44.6	32.3	27.9	23.8	19.0	15.7	13.0	11.5	10.4	9.44	8.90	7.34	4.00
1.65V	259	191.4	156.4	135.3	114.2	93.2	85.6	78.1	70.6	65.7	56.1	44.0	32.0	27.6	23.5	18.9	15.6	13.0	11.5	10.4	9.44	8.90	7.31	4.00
1.70V	244	184.0	144.5	129.9	110.3	90.6	83.4	76.2	69.0	64.3	54.7	43.1	31.5	27.2	23.3	18.7	15.6	12.9	11.4	10.1	9.35	8.90	7.31	3.96
1.75V	215	176.6	138.0	124.2	105.6	87.0	80.4	73.8	67.2	62.7	53.7	42.4	31.1	27.0	23.3	18.7	15.5	12.9	11.3	10.1	9.35	8.80	7.28	3.94
1.80V	190.5	169.3	132.0	118.4	100.9	83.3	77.4	71.4	65.5	61.3	53.0	42.0	30.9	26.8	23.1	18.5	15.4	12.8	11.2	10.1	9.27	8.80	7.23	3.89


Constant Power Discharge Data (Watts per cell at 20°C/ 68°F)

End Volt. Per Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	12h	24h
1.60V	464	360.0	285.8	250.4	215.0	179.6	164.0	148.4	132.8	126.1	112.6	79.9	63.0	53.2	46.8	38.0	32.6	27.8	23.9	21.5	19.1	17.4	14.9	7.65
1.65V	434.5	350.3	278.4	243.7	209.0	174.3	159.7	145.2	130.7	123.6	109.4	77.9	61.1	52.1	46.2	37.5	32.1	27.2	23.5	21.1	18.9	17.3	14.8	7.63
1.70V	425	343.0	270.9	237.3	203.6	170.0	155.8	141.7	127.5	121.1	108.4	76.7	60.1	51.3	45.5	37.0	31.5	26.8	23.2	21.0	18.9	17.2	14.8	7.61
1.75V	387	335.6	263.5	230.6	197.6	164.7	151.6	138.5	125.4	118.6	105.2	75.0	59.3	50.5	44.7	36.4	31.1	26.5	22.8	20.9	18.7	17.1	14.8	7.60
1.80V	352	328.3	255.0	223.1	191.3	159.4	147.0	134.6	122.2	115.5	102.0	73.5	58.3	49.7	44.1	35.9	30.6	26.1	22.5	20.7	18.6	17.0	14.8	7.57


Constant Current Discharge Curve

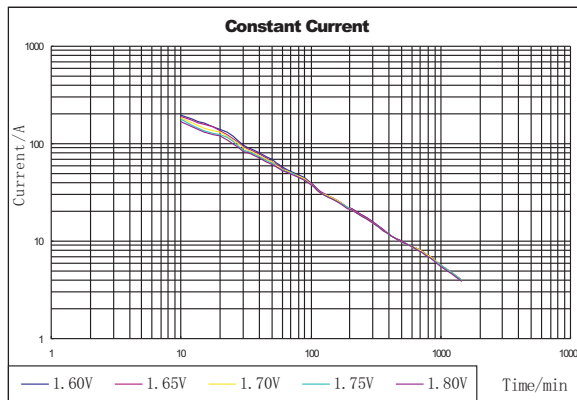


Capacity Vs Temperature

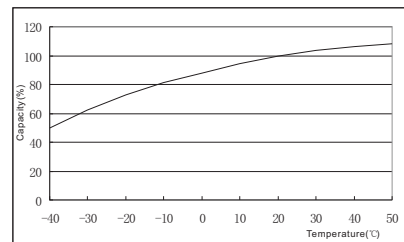


Self Discharge

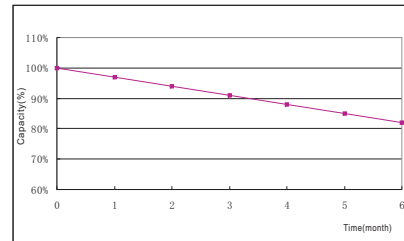

Constant Power Discharge Curve

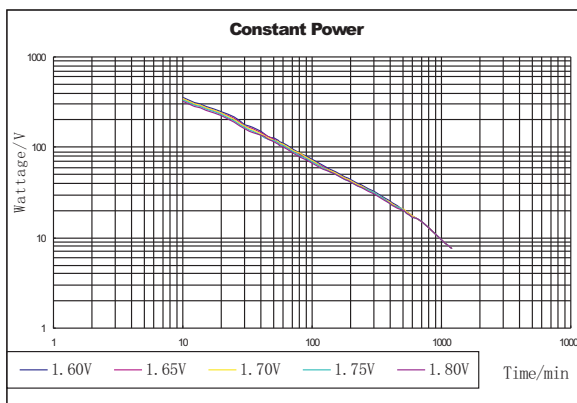

Floating Charge Voltage Vs Temperature

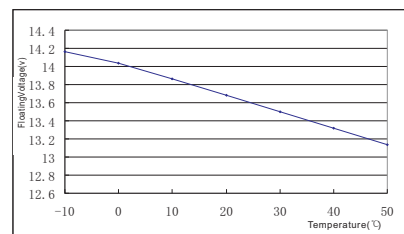

Contact information

Shandong Sacred Sun Power Sources Co., Ltd.
 Add: 1, Shengyang Road, Qufu 273100 Shandong, China
 Tel: +86-537-4438 666 extn 6028 Fax: +86-537-4411 936
 Website: <http://www.abtbatt.com> E-mail: sales@abtbatt.com

ABT VRLA Battery: Available Power Range From 7Ah to 3000Ah

Copyright SACREDSUN,
 All rights reserved.
 (Edition: May, 2011)