

Complying standards:

IEC 61056-1/2-2002
JIS C8702-1/2-2009

AGM TECHNOLOGY
ABT Thunder TM...W Series



TM12-510W

12V 100Ah(20hr)

High Rate Discharge

The ABT Thunder TM...W VRLA are batteries according to Eurobat Classification and specially designed for applications which need high power backup.

Thunder TM...W is the premium plus VRLA battery for UPS and diesel start application.

Mechanical Characteristics




	SI Units	English Units
Length	341mm	13.43inch
Width	173mm	6.81inch
Height	210mm	8.27inch
Total Height	215mm	8.46inch
Approx. Weight	35kg	77.18lbs

Type of material for box and lids :
ABS Standard (FV0 Optional)

Product Characteristics

- Positive and negative grids in lead-calcium tin alloy
- Superior energy density
- More than 40% power output than ABT standard SGP series
- Operates at a low internal pressure
- Usable in any orientation
- A recognized component of UL
- Range of 6V and 12V monobloc from 160W to 1000W per cell for 10' @ 1.60Vpc
- 6 months shelf life at 20°C
- 10 years design life

Dimensions / Terminal



Performance Characteristics

Nominal Voltage	12V
Number of cell	6
Nominal Capacity 68°F(20°C)	10 min wattage @1.60V510W per cell 1 hour rate (67.0A, 1.60V per cell)67.0 Ah 10 hour rate (9.30A, 1.75V per cell) 93.0Ah 20 hour rate (5.0A, 1.75V per cell) 100Ah
Internal Resistance	Fully Charged battery 68°F(20°C) 3.10 mOhms
Mass Energy(Wh/kg)	34.29
Volumic energy(Wh/L)	96.86
Self-Discharge	3% of capacity declined per month at 20°C(average)
Operating Temperature Range	Discharge -20~60°C Charge -10~60°C Storage -20~60°C
Max. Discharge Current	1100A(5s)
Short circuit current	3870A
Charge Methods:	Constant Voltage Charge 68°F(20°C) Cycle use 14.4-15.0V/unit Temperature compensation -30mV/°C/unit Standby use 13.5-13.8V/unit Temperature compensation -20mV/°C/unit Maximum charging current 30 A of rated capacity
Terminal Type	Inserted Thread and bolt M8X φ 18
Torque strength in Nm	12~16
Handle Type	Plastic
Flame arrestor	Yes



Constant Current Discharge Data (Amperes at 20°C)

End Volt. Per Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	12h	24h
1.60V	345.1	256.4	198.1	163.8	139.5	119.9	106.3	95.4	86.2	78.0	67.00	48.57	38.46	31.65	26.66	21.79	17.93	15.17	13.35	12.00	10.87	9.75	8.41	4.50
1.65V	328.0	243.4	190.5	158.8	135.9	116.7	103.3	92.6	84.2	76.2	65.40	47.23	37.87	31.20	26.21	21.43	17.67	14.95	13.18	11.80	10.67	9.61	8.27	4.41
1.70V	313.0	232.6	183.7	154.4	131.5	112.5	99.6	90.2	81.4	73.8	63.80	45.76	37.07	30.61	25.84	20.99	17.27	14.67	12.94	11.62	10.46	9.47	8.13	4.32
1.75V	295.3	222.2	177.8	149.4	127.1	108.5	96.2	86.6	78.4	71.4	62.00	44.27	36.22	30.03	25.39	20.56	16.92	14.36	12.68	11.40	10.30	9.30	7.96	4.25
1.80V	278.0	211.9	170.2	144.0	121.9	104.1	92.0	83.4	75.4	69.0	60.20	42.89	35.57	29.42	25.03	20.15	16.56	14.10	12.37	11.15	10.10	9.14	7.81	4.18


Constant Power Discharge Data (Watts per cell at 20°C)

End Volt. Per Cell	5min	10min	15min	20min	25min	30min	35min	40min	45min	50min	1h	1.5h	2h	2.5h	3h	4h	5h	6h	7h	8h	9h	10h	12h	24h
1.60V	637.0	510.0	395.6	317.2	267.0	231.4	207.1	186.9	168.4	155.2	132.90	96.24	75.78	62.97	53.24	43.13	35.60	30.15	26.25	23.41	21.16	19.33	16.51	9.16
1.65V	605.9	485.1	375.1	307.0	258.5	224.4	201.7	182.1	164.0	151.2	131.10	94.70	74.95	62.35	52.66	42.55	35.23	29.90	26.08	23.27	21.03	19.21	16.42	9.10
1.70V	572.0	461.5	361.2	292.3	250.0	218.1	196.8	178.4	160.7	148.6	129.31	93.50	73.87	61.64	52.07	42.17	34.77	29.57	25.91	23.08	20.91	19.11	16.33	8.94
1.75V	536.0	436.3	343.8	279.8	240.8	209.9	190.6	173.2	156.8	146.0	127.00	91.80	72.83	60.89	51.49	41.76	34.31	29.31	25.74	22.88	20.79	19.00	16.25	8.90
1.80V	502.2	410.4	322.0	268.7	232.8	203.6	184.3	167.7	152.2	142.4	124.82	89.71	71.71	60.14	50.84	41.34	33.86	28.99	25.45	22.66	20.53	18.78	16.09	8.86


Performance drawing

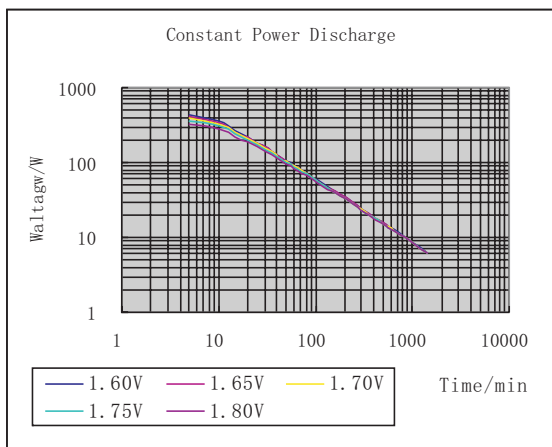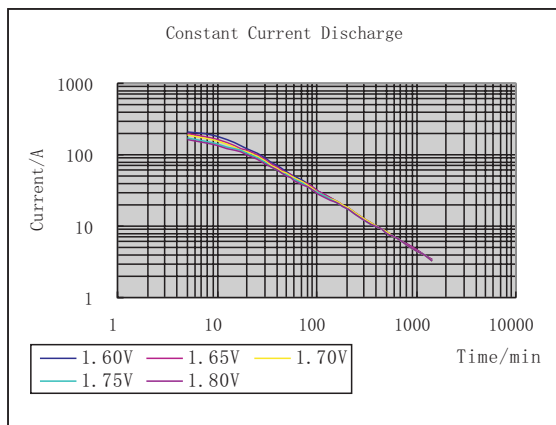


Capacity depend on the temperature

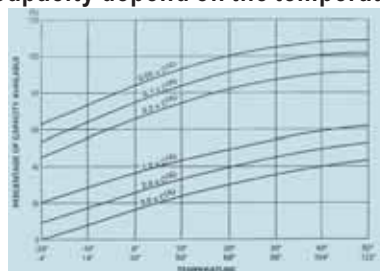

Capacity Retention Characteristic

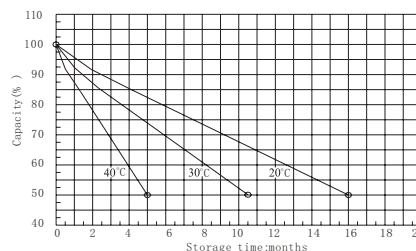

Charge voltage depend on the temperature

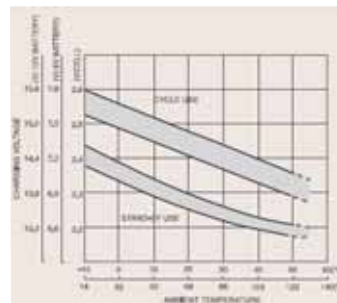

Contact information

Shandong Sacred Sun Power Sources Industry Co., Ltd.
 Add: No1, Shengyang Road, Qufu City, Shandong Province, China 273100
 Tel: +86-537-4438 666 extn 6027 Fax: +86-537-4411 936
 Website: <http://www.abtbatt.com> E-mail: sales@abtbatt.com

ABT VRLA Battery: Available Power Range From 7Ah to 3000Ah

Copyright SACREDSUN,
 All rights reserved.
 (Edition: May. 2011)